


RE-375 COPPER SULFATE ELECTRODE

FIXED-LENGTH VERSION Cat. No. 15102 or 15104

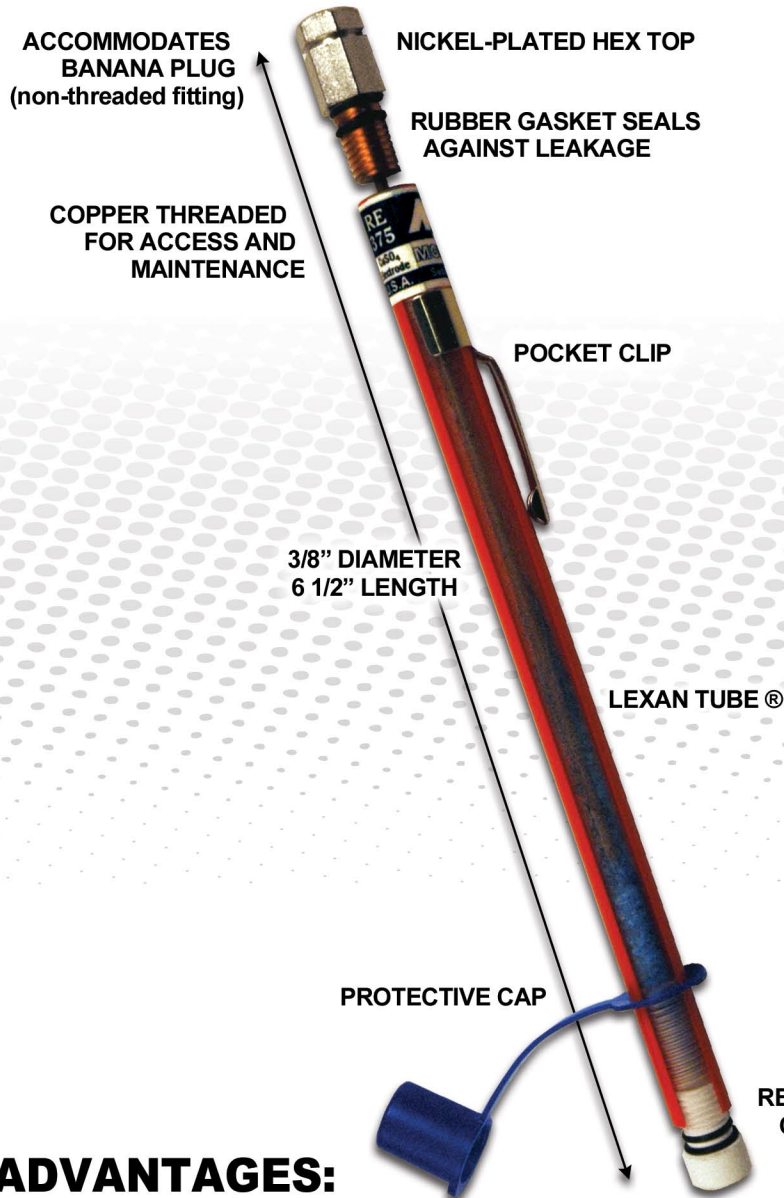

ADVANTAGES:

- Potential measurements through small holes
- Probe into bore holes or paving inserts
- Packaged with distilled water or antifreeze
- Precision-machined for reliable leakproof seals
- Non-leak tubular carrying case (fixed length version)

EXT-375 COPPER SULFATE ELECTRODE

EXTENDABLE-LENGTH VERSION Cat. No. 15105

NICKEL-PLATED HEX TOP

ACCOMMODATES BANANA PLUG
(non-threaded fitting)

3/8" DIAMETER
15" LENGTH

WATER
TIGHT SEAL

LEXAN TUBE®

PROTECTIVE CAP

REPLACEABLE
HARD CERAMIC TIP

Cat. No. 16225
15" EXTENSION

Cat. No. 16230
30" EXTENSION

Length can be extended by
the insertion of additional
extension rods, either:
15" long (Cat. No. 16225) or
30" long (Cat. No. 16230)



Cat. No. 14995 1/4-20
THREADED ADAPTER

Threaded Adapter
allows connection of
RE-375 Electrode to:
Digital Potential Meter (Cat. No. 4110)
Analog Potential Meter (Cat. No. 4107)
(Meters sold separately)

ADVANTAGES:

- Threaded connections will not pull apart
- Sections internally wired for continuity
- Circumferential and longitudinal wound Fiberglass for exceptional strength



INSTRUMENTS AND EQUIPMENT FOR THE CORROSION ENGINEER

M.C. Miller Co. Inc. 11640 U.S. Highway 1 Sebastian, FL 32958

Telephone: 772.794.9448 Fax: 772.589-9072 www.mcmiller.com